

Liquid Coffee Refrigerated Dispenser

Features

Liquid Coffee Refrigerated Dispenser

- Refrigerated product cabinet extends product flavor profile, maintains 38°-42°F in product compartment.
- Attractive appearance and narrow (12") width.
- Dispense over 125 - 5 oz. cups per hour with a 120 volt, 15 amp electrical connection or over 500 - 5 oz. cups per hour with a 240 volt / 30 amp electrical connection.
- Accommodates all ½ gallon and most 1 gallon bag-in-box (BIB) containers.
- Refill or rinse LED lights alert the operator for concentrate or cleaning.
- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz) eliminating the need to inventory multiple electrical configurations.
- FlavorGuard® technology continuously monitors extract-to-water ratio and assures flavor consistency.
- Easy-to-program one touch portion control model is available for self-serve applications.



Model LCR-2*

Dimensions: 38" H x 12.2" W x 24.9" D
(96.5 cm H x 31 cm W x 63.2 cm D)



Model LCR-2, PC*

LCR is also available
with portion control

For current specification sheets and other information, go to www.bunn.com.

* International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 39000.0001



Easy Clear® EQHP-25
Product No. : 39000.0005

Easy Clear® EQHP-25L
Product No. : 39000.0002



1/8" Replacement tube kits
Product No. : 34728.1000

3/16" Replacement tube kits
Product No. : 34727.1000



Scholle BIB connector
Product No. : 35057.0000



LiquiBox QC/D II
BIB connector
Product No. : 35055.0000

50ml Graduated Cylinder Kit
Product No. : 34843.1000
For use in calibration of pumps.



Model

LCR-2

Agency Listing



Patents Apply

12/08

A6.2

Dimensions & Specifications


Model	Product Number	Dispense Rate/Sec.		Connector Type	Volts	Amps	Heater Watts	Capacity**	Cubic Feet	Shipping Weight	Cord Attached
		1.8 oz.	2.5 oz.*								
Product Ratios											
LCR-2	34400.0036†	45:1-100:1	65:1-100:1	Scholle	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2	34400.0037†	25:1-45:1	25:1-65:1	Scholle	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2	34400.0038†	45:1-100:1	65:1-100:1	LiquiBox QC/D II	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2	34400.0039†	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
†All models can be changed to these electrical configurations.					208	25.8	4700	385 cups/hr.	10.9	114 lbs.	No
					240	25.8	6200	512 cups/hr.	10.9	114 lbs.	No
LCR-2, PC	36500.0036†	45:1-100:1	65:1-100:1	Scholle	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2, PC	36500.0037†	25:1-45:1	25:1-65:1	Scholle	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2, PC	36500.0038†	45:1-100:1	65:1-100:1	LiquiBox QC/D II	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2, PC	36500.0039†	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
LCR-2, PC	36500.0049	45:1-100:1	65:1-100:1	Scholle QC	120	14.2	1700	125 cups/hr.	10.9	114 lbs.	Yes***
†All models can be changed to these electrical configurations.					208	25.8	4700	385 cups/hr.	10.9	114 lbs.	No
					240	25.8	6200	512 cups/hr.	10.9	114 lbs.	No

*Unit shipped with dispense rate set at 1.8 oz./sec. Dispense rate increases to 2.5 oz./sec. if restrictor plug is removed.

Capacity measured with a 5 oz. cup. *Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.

Plumbing: 20-90 psi (138-621 kPa) from a 3/8" (10 mm) or larger supply line. Unit requires a 2.2 gpm line flow capacity. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce pressure to 50 psi. Supplied with 3/8" (10 mm) male flare fitting.

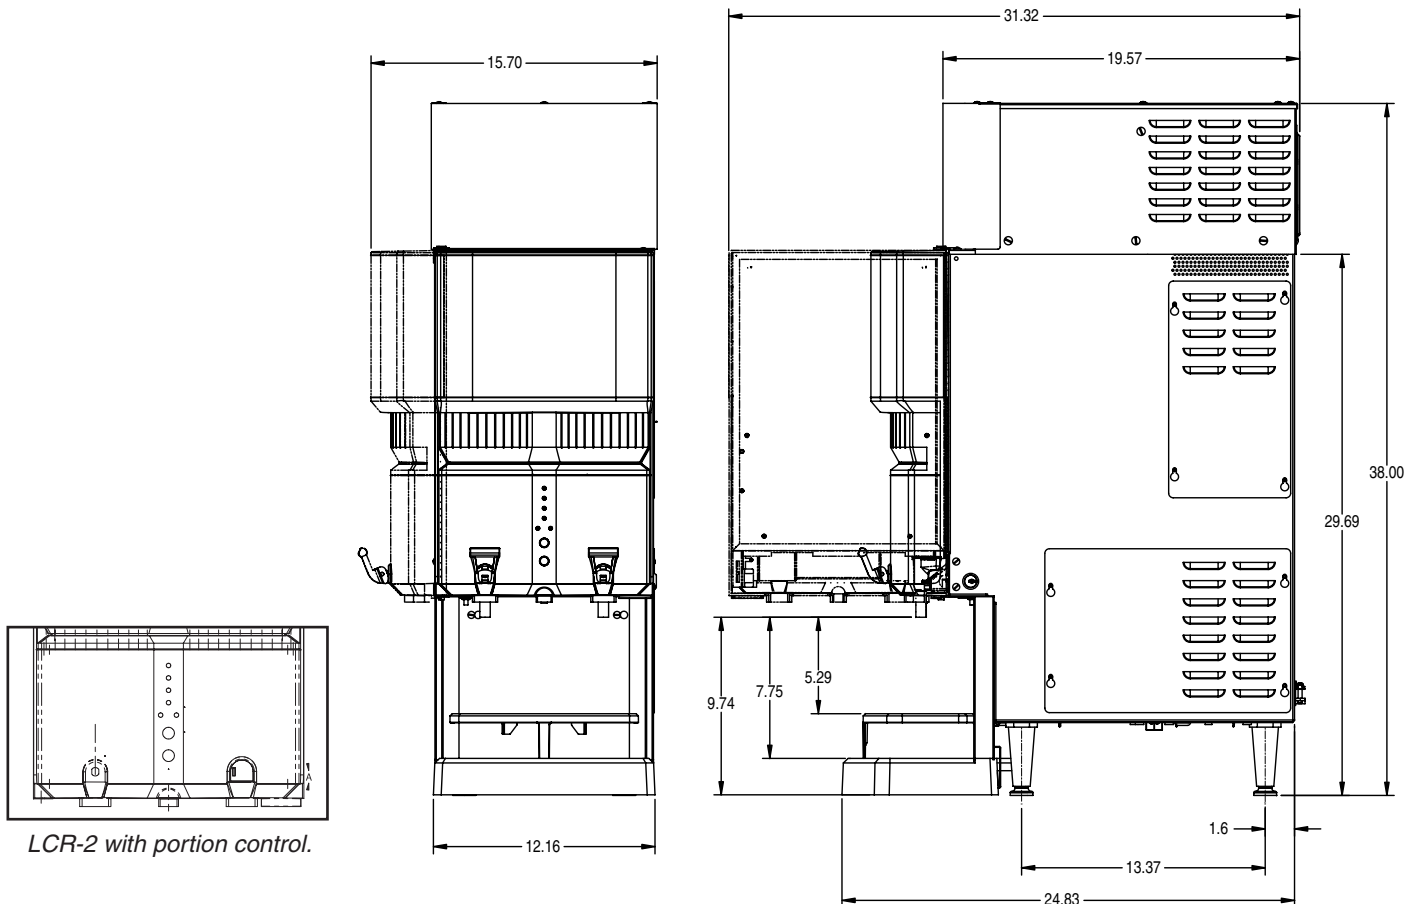

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

12/08 © Bunn-O-Matic Corporation